

DUS60

Veterinary Ultrasound



Powerful technologies to increase your diagnostic confidence

Phase Inversion Harmonic Imaging technology provides best image quality
PW Doppler supplies physiologic information for increased diagnostic value
Five-frequency transducers increases versatility



Go anywhere you need to go

Compact and lightweight design for excellent mobility
Built-in battery provides up to 2 hours of point-of-care imaging
Large capacity data storage



Intuitive user-friendly design

One touch image optimization via smart IP key
Backlit, easy-to-use control panel
User-defined keys to customize your work-flow



Practical tools enhance efficiency

Intelligent 8-segment TGC for precise adjustment
Multi-format data transfer via USB and DICOM
Multiple-pseudo-color options enhance image presentation



Canine Kidney




Canine Gall Bladder



Canine Bladder



Canine Renal Stone

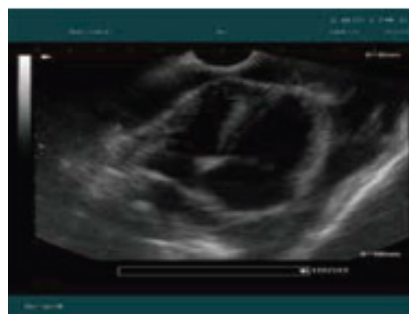

Canine Heart

Diagnostic Imaging

The dus60 is an impressive new compact ultrasound system, providing superb value and quality across the entire range of applications. The addition of PW Doppler increases diagnostic information content.



Transducer Specifications:



General:

Imaging mode: B, 2B, 4B, B+M, M, and PW
 Gray scale levels: 256
 Display: 12.1 TFT-LCD
 Transducer frequency: 2.0-10.0MHz
 Transducer connector: 2 standard Beam
 Forming:

- Phase Inversion Harmonic Imaging
- Multi-Beam Technology
- Synthetic Receiving Aperture
- Dynamic Receiving Focusing
- Real-time Dynamic Aperture
- Dynamic Frequency Scanning
- Dynamic Apodization

Scanning angle:

- Up to 155 degrees (transducer dependent)

Scanning depth (mm):

- From 19 to 324 (transducer dependent)

Functions:

Cine loop:

- 256-frame bidirectional cine-loop

Zoom:

- x1.0, x1.2, x1.4, x1.6, x2.0,
x2.4, x3.0, x4.0 in distance

Panoramic zoom in real-time and freeze

Storage media:

- Built-in Flash, internal large capacity data storage

Built-in image archive:

- 504MB built-in image storage

Body marks: 40 types

Transducer auto-detection

Display:

Date, Time, Probe Frequency, Frame Rate, Host, ID, Hospital Name, Depth, Frame Rate, Exam Type, Measurement Values, Gain, IP, Body Marks, Annotations, Probe Position

Others:

Peripheral ports:

- S-video output: 1
- Video output: 1
- VGA output: 1
- USB port: 2
- Ethernet port: 1
- Remote control: 1
- Footswitch port: 1

Power supply: 100V-240V ~ 50Hz/60Hz

Lithium battery: Continuous operation for up to 2 hours

Dimensions: 330mm (13.0") L x220mm (8.7") W x320mm (12.6") H

Net weight: 7.1kg (15.7 lb)

Imaging Processing:

Pre-processing: Dynamic Range

- Frame Persist

- Gain

- 8-segment TGC adjustment

- IP (Imaging Process)

Post-processing: Gray map

- Speckle Reduction Technology

- Pseudo-color

- Gray Auto Control

- Black/white invert

- Left/right invert

- Up/down invert

- Image rotation at 90° interval

Measurement & Calculation:

B-mode: Distance, circumference, area, volume, ratio % stenosis, histogram, and angle

M-mode: Distance, time, slope, and heart rate

Doppler: Time, heart rate, velocity, acceleration, trace, and RI

Software packages:

- Canine, feline, equine, bovine, ovine

Standard Configurations:

Clarity main unit

12.1" TFT-LCD monitor

Two transducer connectors

Pulsed wave Doppler

Multiple-pseudo-color Imaging

256-frame cine loop memory

504MB built-in image storage

Two USB ports

Measurement & calculation software packages

Options:

Micro-convex array transducer:

- C611-2 (5.5/6.5/7.5/H9.0/
H9.4MHz)

Micro-convex array transducer:

- C321-2 (2.5/3.5/4.5/H5.0/
H5.4MHz)

Convex array transducer:

- C361-2 (2.5/3.5/4.5/H5.0/
H5.4MHz)

Linear array transducer:

- L761-2 (6.5/7.5/8.5/H9.0/
H9.4MHz)

Linear array transducer:

- L743-2 (6.5/7.5/8.5/H9.0/
H9.4MHz)

Endorectal transducer:

- V563-2 (4.5/5.5/6.5/H8.0/
H8.4MHz)

Transducer needle-guide brackets

Large capacity data storage

Video printer

Laser printer

Inkjet printer

Footswitch

Li-ion battery

Mobile trolley

Hand-carry bag

DICOM 3.0

UMS100 workstation software